

## Quality Storm Windows Built to Last a Lifetime.

DYC storm windows offer the homeowner a viable alternative in thermally efficient window products that can save substantial heating and cooling cost. Our storm windows help reduce air, dust, and pollen infiltration and also are effective on outside sound control. They are easily installed on older and newer homes and they are custom built to each opening. The dual durometer vinyl “thermal break” reduces conduction of heat and cold. We use durable environmentally friendly power coat finishes on our painted windows.



### 240 SERIES TWO TRACK SOLID FRAME STORM WINDOW FEATURES

- Sturdy solid main frame construction
- Single hung design with half insect screen
- Sashes easily remove for cleaning
- Available in four environmentally friendly VOC free finishes
- Custom built to exact size
- Moderately priced for quicker payback
- Tinted glass options available



### 040 SERIES TWO TRACK HOLLOW FRAME STORM WINDOWS FEATURES

- Single hung design with extra strong hollow tubular frame
- Stronger narrow profile main frame
- Available in four environmentally friendly VOC free finishes
- Custom built to exact size
- Tinted glass options available
- Half insect screen standard



### 340-F/FS SERIES THREE TRACK HOLLOW FRAME STORM WINDOW FEATURES

- Double hung design with super strong hollow tubular frame
- Ideal for use on wood windows
- Insect screening is standard on 340-F series
- Phifer solar insect screening is standard on the 340-FS series, blocking 65% of the sun's heat and glare
- Optional Phifer solar screening offers the ultimate in shading protection by blocking up to 90% of the sun's heat while offering excellent outward visibility
- Tinted glass options available
- Custom built to exact size



**MECHANICAL INTERLOCKING MEETING RAIL**

**SPRING LOADED FORCED ENTRY RESISTANT METAL SASH LOCK**

**CONTINUOUS WIND LOCK/NYLON CORNER TILT KEY**

**DON YOUNG COMPANY STORM WINDOW ADVANTAGE**  
**CONVENIENT SELF STORING ALUMINUM STORM WINDOWS**


1. "Offset Design" built into main frame provides extra clearance from primary window and additional dead air space for more insulation and easier access for operation of sashes.
2. Self-sealing "dual durometer vinyl thermal-break" around the perimeter flange aids in reducing conduction of heat and cold.
3. "Hollow extruded main frame" with mitered, sealed corners is fastened with two screws on each corner for structural stability.
4. "Marine glazing" wraps around glass for a positive barrier against air and water infiltration.
5. Patented ALLER-GUARD 100<sup>®</sup> with Microban<sup>®</sup> weather stripping for additional protection against mold, mildew, and pollen infiltration. The weather strip has double mylar fins on the full perimeter of all main frame tracks and is silicone impregnated for smooth operation and includes a UV stabilizer.
6. "Spring loaded" forced entry resistant metal sash locks ensure a positive lock on all glass and screen inserts.
7. "Mechanical interlocking meeting rails" combined with top and bottom wind deflectors helps eliminate rattles, dust, pollen, and excessive air infiltration.
8. "Nylon corner-key tilt pins" on sash insert corners reduce friction of moving parts, and assures quiet effortless operation.
9. Hollow tubular frame provides extra strength and prevents twisting of windows.
10. Extremely low air infiltration rates.
11. DYC storm windows use environmentally friendly VOC free powder coat finishes and are also available in mill finish.



**SELF-SEALING DUAL DUROMETER VINYL THERMAL BREAK**



**MAIN FRAME SECTIONS**

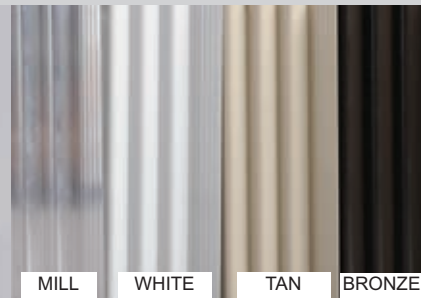

**COLOR OPTIONS**

**DON YOUNG COMPANY LOCATIONS**

**DALLAS**

8181 Ambassador Row  
 P.O. Box 560608  
 Dallas, TX 75356  
 214-630-0934  
 FAX 214-630-0406

**HOUSTON**

651 North Shepherd  
 Suite 400  
 Houston, TX 77007  
 713-868-1398  
 FAX 713-868-4053

**LUBBOCK**

3827 Avenue A  
 Lubbock, TX 79404  
 806-747-2181  
 FAX 806-747-2184

**SAN ANTONIO**

1936 Shipman  
 San Antonio, TX 78219  
 210-225-0352  
 FAX 210-226-6684

**OKLAHOMA CITY**

901 Enterprise, Bay 1-3  
 Oklahoma City, OK 73128  
 405-947-2000  
 FAX 405-947-2035