

Quality Storm Windows Built to Last a Lifetime.

DYC storm windows offer the homeowner a viable alternative in thermally efficient window products that can save substantial heating and cooling cost. Our storm windows help reduce air, dust, and pollen infiltration and also are effective on outside sound control. They are easily installed on older and newer homes and they are custom built to each opening. The dual durometer vinyl "thermal break" reduces conduction of heat and cold. We use durable environmentally friendly powder coat finishes on our painted windows.



240 SERIES TWO TRACK SOLID FRAME STORM WINDOW FEATURES

- · Sturdy solid main frame construction
- Single hung design with half insect screen
- · Sashes easily remove for cleaning
- · Available in four environmentally friendly VOC free finishes
- Custom built to exact size
- Moderately priced for quicker payback



340 F/FS SERIES THREE TRACK HOLLOW FRAME STORM WINDOW FEATURES

- Double hung design with super strong hollow tubular frame
- · Ideal for use on wood windows
- Insect screening is standard on 340-F series
- Phifer solar insect screening is standard on the 340-FS series, blocking 65 % of the sun's heat and glare
- Optional Phifer solar screening offers the ultimate in shading protection by blocking up to 90% of the sun's heat while offering excellent outward visibility
- · Custom built to exact size





MECHANICAL INTERLOCKING MEETING RAIL


RESISTANT SASH LOCK

CORNER TILT KEY

DON YOUNG COMPANY STORM WINDOW ADVANTAGE

Convenient Self Storing Aluminum Storm Windows

- 1. "Offset Design" built into main frame provides extra clearance from primary window and additional dead air space for more insulation and easier access for operation of sashes.
- 2. Self-sealing "dual durometer vinyl thermal- break" around the perimeter flange aids in reducing conduction of heat and cold.
- 3. Hollow extruded main frame with mitered, sealed corners is fastened with two screws on each corner for structural stability.
- 4. "Marine glazing" wraps around glass for a positive barrier against air and water infiltration.
- 5. Patented ECO-BAN antimicrobial weather stripping for additional protection against mold, mildew, and pollen infiltration. The weather strip has double mylar fins on the full perimeter of all main frame tracks and is silicone impregnated for smooth operation and includes a UV stabilizer.
- 6. "Spring loaded" forced entry resistant sash locks ensure a positive lock on all glass and screen inserts.
- 7. "Mechnical interlocking meeting rails" combined with top and bottom wind deflectors helps eliminate rattles, dust, pollen, and excessive air infiltration.
- 8. "Nylon corner-key tilt pins" on sash insert corners reduce friction of moving parts, and assure quiet effortless operation.
- 9. Hollow tubular frame provides extra strength and prevents twisting of windows.
- 10. Extremely low air infiltration rates.
- 11. DYC storm windows use environmentally friendly VOC free powder coat finishes and are also available in mill finish.

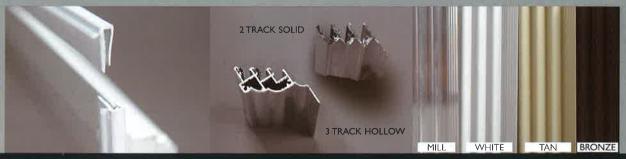

SELF-SEALING DUAL DUROMETER VINYL THERMAL BREAK

MAIN FRAME SECTIONS

COLOR OPTIONS

DON YOUNG COMPANY LOCATIONS

DALLAS

8181 Ambassador Row P.O. Box 560608 Dallas, TX 75356 214-630-0934 FAX 214-630-0406

HOUSTON

307 Garden Oaks Blvd. Houston, TX 77018 713-868-1398 FAX 713-868-4053

LUBBOCK

3827 Avenue A Lubbock, TX 79404 806-747-2181 FAX 806-747-2184

SAN ANTONIO

1936 Shipman San Antonio, TX 78219 210-225-0352 FAX 210-226-6684

OKLAHOMA CITY

901 Enterprise, Bay 1-3 Oklahoma City, OK 73128 405-947-2000 FAX 405-947-2035